


1900R	2200R	2600R	2700V NXT2	3300V NXT2
4013 mm	4089 mm	4089 mm	4252 mm	4369 mm
3061 mm	3124 mm	3124 mm	3310 mm	3332 mm
2032 mm	2057 mm	2057 mm	2057 mm	2083 mm
3226 mm w/ 1676 mm Bucket	3467 mm w/ 1778 mm Bucket	3632 mm w/ 1778 mm Bucket	3759 mm w/ 1778 mm Bucket	3874 mm w/ 1880 mm Bucket
42°	40°	40°	42°	42°
2311 mm	2388 mm	2388 mm	2540 mm	2502 mm
572 mm	686 mm	686 mm	813 mm	813 mm
26°	28°	28°	29°	29°
96°	95°	95°	94°	94°
991 mm	1016 mm	1016 mm	1016 mm	1041 mm
1067 mm	1092 mm	1257 mm	1257 mm	1257 mm
1638 mm	1758 mm	1758 mm	1758 mm	1816 mm
1676 mm	1778 mm	1778 mm	1778 mm	1880 mm
165 mm	203 mm	203 mm	203 mm	229 mm
2388 mm	2667 mm	2832 mm	2959 mm	3023 mm
25°	25°	25°	25°	25°
2007 mm	2223 mm	2286 mm	2286 mm	2400 mm
1130 mm	1321 mm	1422 mm	1422 mm	1422 mm
1486 mm	1524 mm	1626 mm	1689 mm	1765 mm
10.00x16.5 HD	12.00x16.5 HD	12.00x16.5 HD	12.00x16.5 HD	14.00x17.5 HD
Yanmar	Yanmar	Yanmar	Yanmar	Yanmar
4TNV98C-XNMS Stage 3B	4TNV98C-XNMS Stage 3B	4TNV98C-XNMS Stage 3B	4TNV98C-XNMS Stage 3B	4TNV98C-XNMS Stage 3B
51.7 kW @ 2500	53.7 kW @ 2500	53.7 kW @ 2500	53.7 kW @ 2500	53.7 kW @ 2500
51 kW @ 2500	52.7 kW @ 2500	52.7 kW @ 2500	52.7 kW @ 2500	52.7 kW @ 2500
241 Nm @ 1625	294 Nm @ 1625	294 Nm @ 1625	294 Nm @ 1625	294 Nm @ 1625
3.3 L	3.3 L	3.3 L	3.3 L	3.3 L
70 L/min	90 L/min	90 L/min	89 L/min	89 L/min
119 L/min	132.5 L/min	132.5 L/min	132 L/min	132 L/min
30.3 L	30.3 L	30.3 L	40 L	40 L
950 CCA	950 CCA	950 CCA	950 CCA	950 CCA
3.0 kW	3.0 kW	3.0 kW	3.0 kW	3.0 kW
95-amp	95-amp	95-amp	95-amp	95-amp
862 kg	998 kg	1179 kg	1225 kg	1497 kg
957 kg	1075 kg	1261 kg	1361 kg	N/A
62.5 L	68.1 L	81.4 L	92.7 L	92.7 L
12.1 km/hr	12.9 km/hr	12.9 km/hr	12 km/hr	13 km/hr
20.1 km/hr	19.2 km/hr	19.2 km/hr	19.2 km/hr	19.6 km/hr
3121 kg	3620 kg	3719 kg	3697 kg	4123 kg
101 dB(A)	101 dB(A)	101 dB(A)	101 dB(A)	101 dB(A)
85 dB(A)	85 dB(A)	85 dB(A)	85 dB(A)	85 dB(A)
0.80 m/s²	0.96 m/s²	0.96 m/s²	1.07 m/s²	1.07 m/s²
1.30 m/s²	1.50 m/s²	1.50 m/s²	1.50 m/s²	1.50 m/s²


REFERENCE DIAGRAMS

RADIAL-LIFT

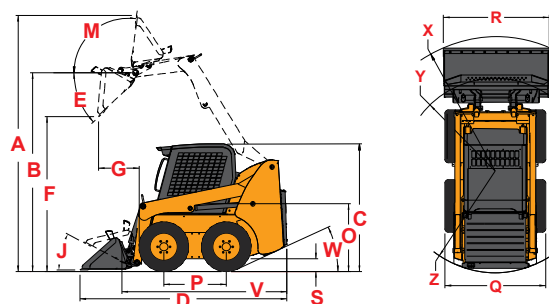

VERTICAL-LIFT

2700V NXT2 / 3300V NXT2

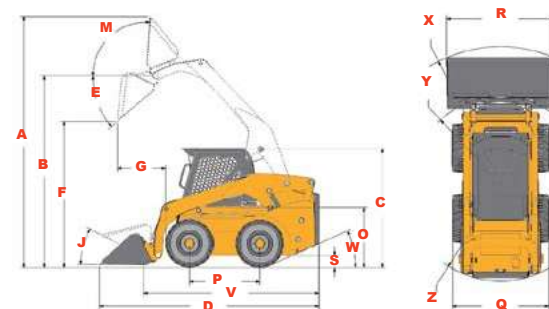

- A Overall width is dependent upon the amount of wheel offset.
- B Per SAE J818, SAE J732, and ISO 14397
- C Weight of base unit with standard equipment, standard tires (heavy-duty flotation), standard dirt-construction bucket and 79 kg operator.