

Gama WEDA D

Datos técnicos




		WEDA D04N	WEDA D04BN	WEDA D08N	WEDA D10N	WEDA D10N	WEDA D30L	WEDA D30L	WEDA D30N	WEDA D30N	WEDA D40N
ESPECIFICACIONES		Monofásica	1ph	1ph	1ph	3ph	1ph	3ph	1ph	Trifásica	Trifásica
Altura máx. de bombeo	m	11,2	12,0	14,8	14,7	14,4	15,7	15,1	22	22	20
	pies	37	39	49	48	47	52	50	74	72	67
Caudal máx.	l/min	230	120	330	490	490	1480	1450	860	850	1580
	m³/h	14	7	20	30	29	89	87	52	51	95
	gpm	61	32	86	131	129	390	380	230	220	420
Velocidad del eje	r.p.m	2900	2900	2900	2900	2900	2900	2900	2900	2900	2900
Potencia de salida nominal	kW	0,4	0,4	0,8	1,0	1,0	2,0	2,0	2,0	2,0	3,0
	HP	0,5	0,5	1,0	1,3	1,3	2,7	2,7	2,7	2,7	4,0
Potencia máx. de entrada	kW	0,7	0,7	1,2	1,6	1,3	2,6	2,6	2,6	2,6	3,6
Conexión de descarga	mm	50	25	50	50	50	75	75	75	75	75
	pulg.	2	1	2	2	2	3	3	3	3	3
Tamaño máx. de part. sólidas	mm	7,5	4,5	7,5	4,0	4,0	7,0	7,0	7,0	7,0	7,0
	pulg.	0,30	0,18	0,30	0,16	0,16	0,28	0,28	0,28	0,28	0,28
PESO Y DIMENSIONES											
Peso	kg	9,0	9,5	12,4	13,0	13,0	20	20	20	20	25
	lbs.	20	21	28	29	29	44	44	44	44	56
Altura	mm	340	415	358	395	395	525	525	495	495	525
	pulg.	13,4	16,3	14,1	15,6	15,6	20,7	20,7	19,5	19,5	20,7
Ancho	mm	182	220	183	225	225	290	290	290	290	290
	pulg.	7,2	8,7	7,2	8,9	8,9	11,4	11,4	11,4	11,4	11,4
Diámetro	mm	182	220	183	185	185	220	220	220	220	220
	pulg.	7,2	8,7	7,2	7,3	7,3	8,7	8,7	8,7	8,7	8,7

Aplicaciones típicas


- Construcción en general
- Agua bruta
- Minería y canteras
- Inundaciones y ayuda de emergencia
- Aguas freáticas
- Obras
- Achique industrial

Curvas de rendimiento


 WEDA D04N

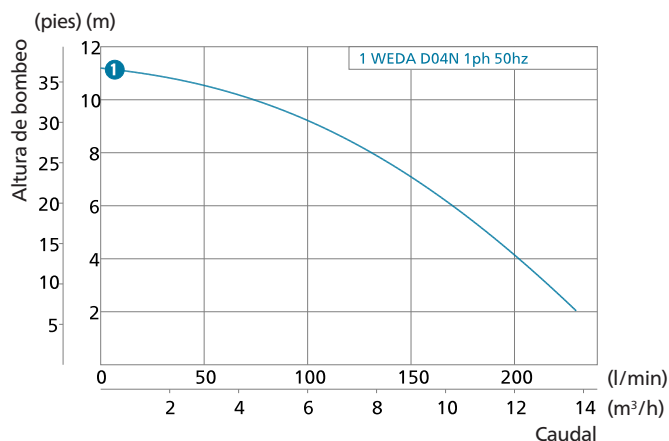


 WEDA D04BN

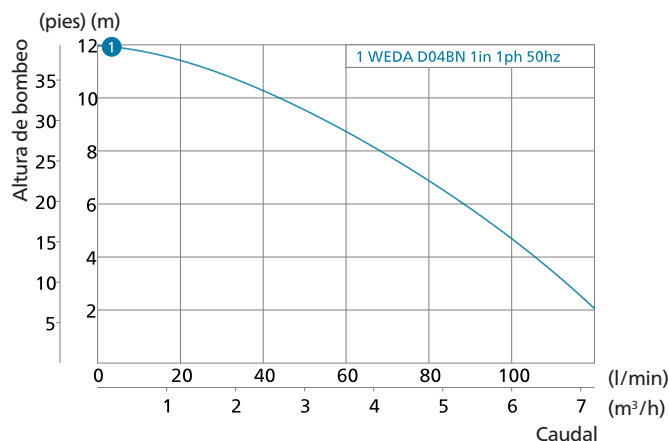


 WEDA D08N

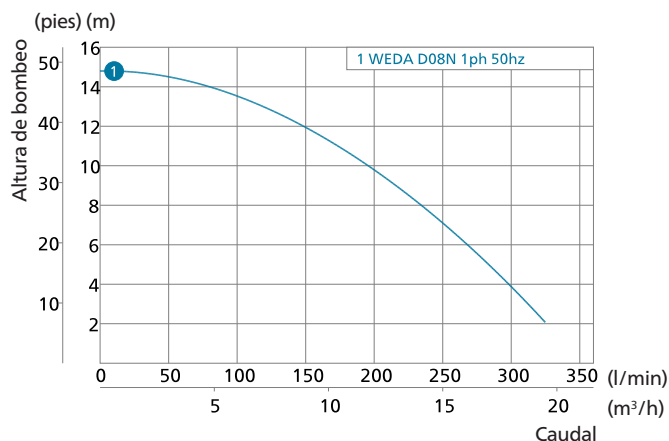

 WEDA D10N

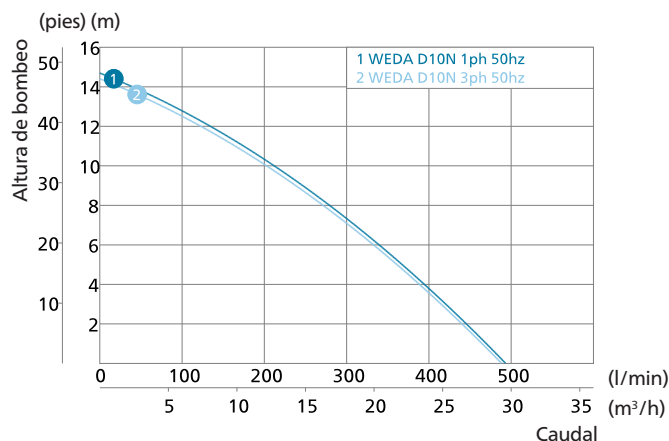

 WEDA D30

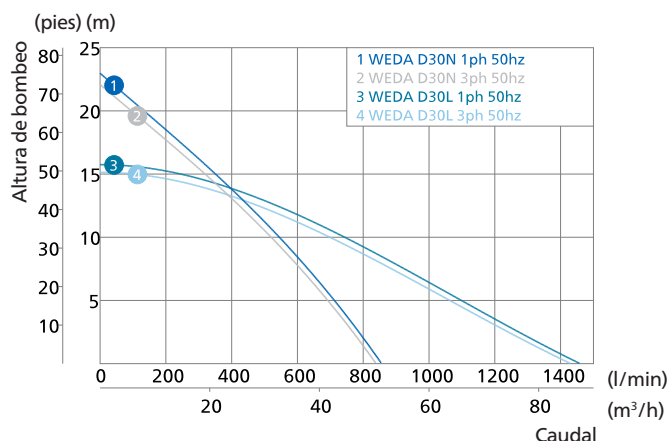

 WEDA D40N

